


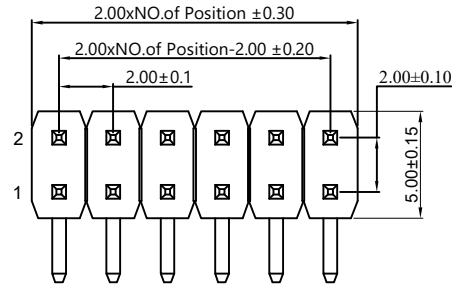


RoHS

受控

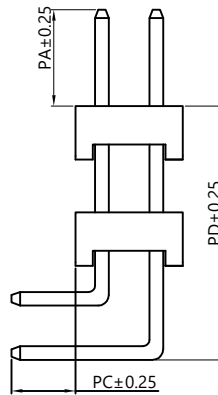

P.C.B Layout

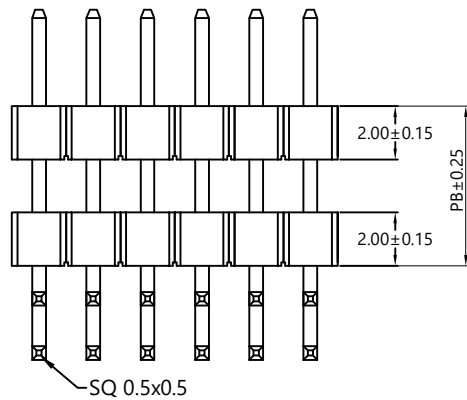

SPECIFICATION:

- Current Rating: 1.5Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance: 20mΩ Max
  - Withstanding Voltage: 500VAC(1Min)
  - Max Processing Temp: 230°-260° for 10 seconds
  - Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
  - Contacts: Brass
  - Contact Plated: Gold Plated

Ordering Information

PH200DH 200 RT- 2xx G A 0 301

Insulator height 200=2.00mm  
 No. of Pins 220=2x20PIN  
 Plating G=Gold Plated S= Tin Plated  
 Material A=PA6T  
 Package 0=PE Bag

Dimension antitheses list					
ITEM	PA	PD	PC	Ls	LI
Alternate	4.00	9.50	3.00	16.00	20.00

SCONDAR ELECTRONIC LTD  
 ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YaoQ	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO		NEW			X.X	±0.35	DESIGN	LYao	2013.06.11	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2013.06.12	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
					Angle	± 3'				PROJ.	↗	
					DIM	TOL				TITLE:	PH200DH200RT-2xxGA1301	
											PH2.00 DH2.00mm RT Gold flash PA6T 2xxP Pin header	