

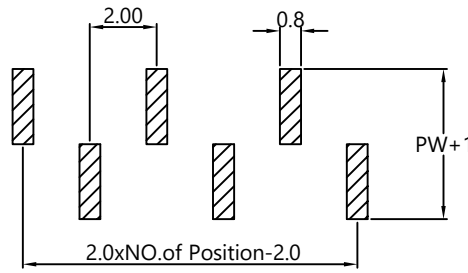
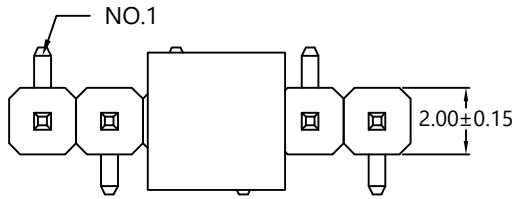


RoHS

受控

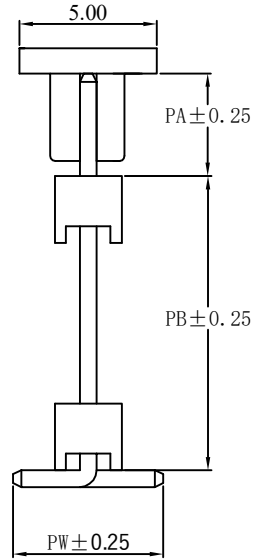

TYPE A
PCB LAOUT

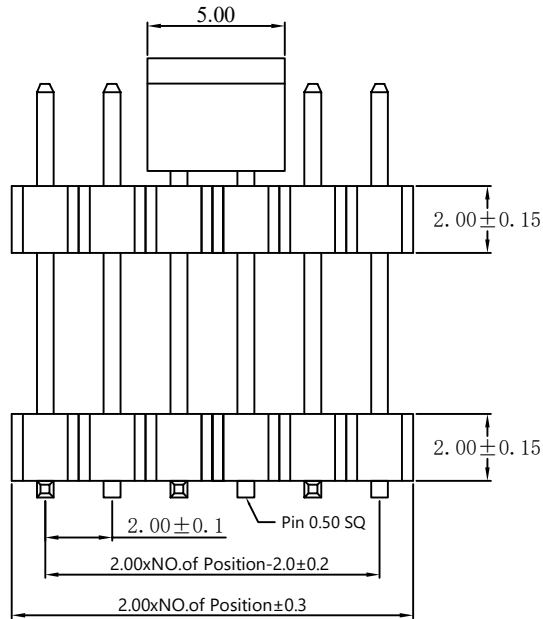

SPECIFICATION:

- Current Rating:1.5Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 10 s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

Ordering Information

PH200DH 200 SMT -1xx G A 1 301 A

Insulator height 200=2.00mm
 No.of Pins 110=1X10P
 Plating G=Gold Plated S=Tin Plated
 Material A=PA6T
 Package 1=Tape&Reel
 PCB layout typeA

Dimension antitheses list

PA	PB	PW	HW	H
4.00	9.00	4.50	2.00	2.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	NEW			OPERATION	DRAW	YaoQ	2017.06.11	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DESIGN	Lyao	2017.06.11	UNIT	mm	
					CHECK	Lisa	2017.06.13	SIZE	A4	
					APPROVE			SHEET	1/1	
								PART NO.	PH200DH200SMT-1xxGA1301A	
								PROJ.	PH2.0 DH2.0 SMT Gold flash PA6T 1XXPIN header reel&tap with cap PCB layout typeA	