

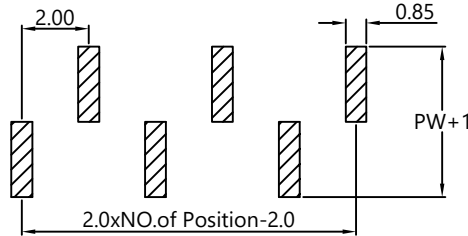
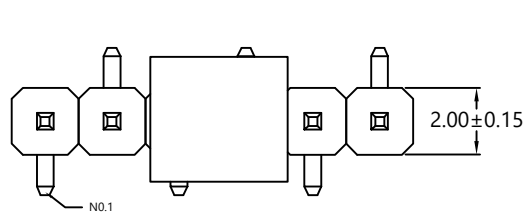


RoHS

受控

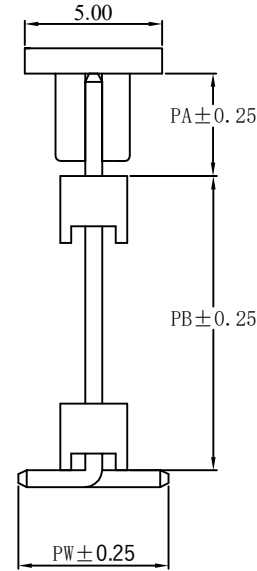

TYPE B
PCB LAOUT

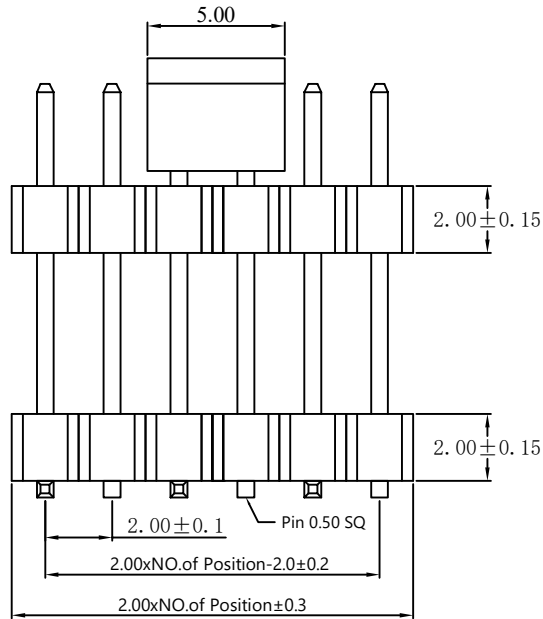

SPECIFICATION:

- Current Rating:1.5Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp:230°-260°for 10 s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

Ordering Information

PH200DH 200 SMT - 1xx G A 1 301 B

Insulator height 200=2.00mm
 No.of Pins 110=1X10P
 Plating G=Gold Plated S=Tin Plated
 Material A=PA6T
 Package 1=Tape&Reel
 PCB layout typeB

Dimension antitheses list

PA	PB	PW	HW	H
4.00	9.00	4.50	2.00	2.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YaoQ	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN	Lyao	2017.06.11	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2017.06.13	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
AO		NEW			Angle	± 3'				PART NO.	PH200DH200SMT-1xxGA1301B	
					DIM	TOL				PROJ.	 TITLE: PH2.0 DH2.0 SMT Gold flash PA6T 1XXPIN header reel&tap with cap PCB layout typeB	