
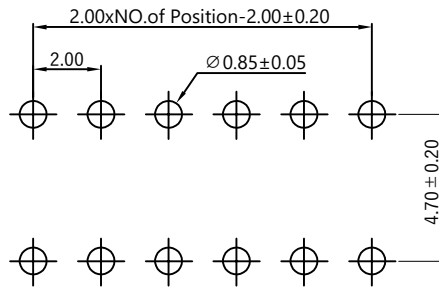


RoHS



受控

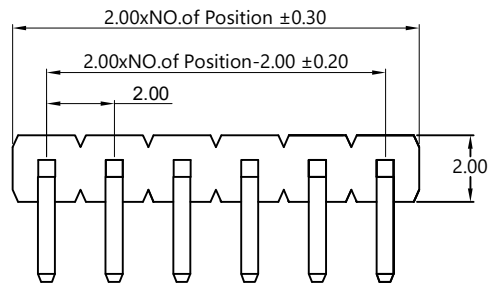

P.C.B Layout

SPECIFICATION:

- Current Rating:1.5Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25°C to +105°C
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

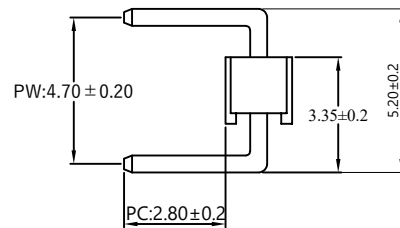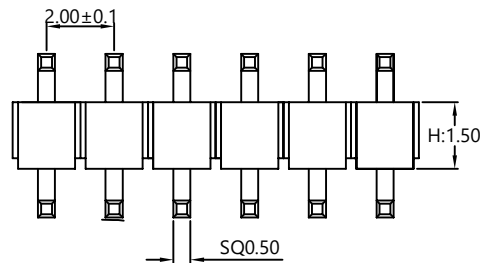

Ordering Information

PH200H150 WRU-1xx G A 0 301

Insulator height
150=1.50mm
200=2.00mm

No.of Pins
20=20PIN

Plating
G=Gold Plated
S=Tin Plated

Material
A=PA6T

Package
0=PE Bag

Dimension antitheses list

PW	PC	H
4.70	2.80	1.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	YaoQ	2017.06.12	SCALE	-
X.X ±0.35	DESIGN	LYao	2017.06.12	UNIT	mm
X.XX ±0.25				SIZE	A4
X.XXX ±0.15				CHECK	Lisa
Angle ± 3'	APPROVE			SHEET	1/1
DIM TOL				PROJ.	☉

SCONDAR
SCONDAR ELECTRONIC LIMITED

AO	NEW	CHANGE	APPROVE	PH200H150WRU-1xxGA0301
REV	DATE	MODIFICATION DESCRIPTION		PH2.00 H1.50 RT U shape Gold flash PA6T 1xxP Pin header