
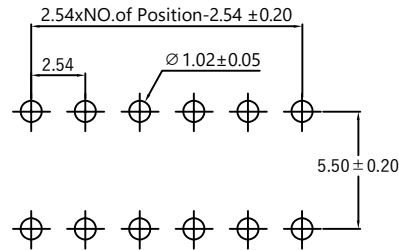




RoHS

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25°C to +105°C
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

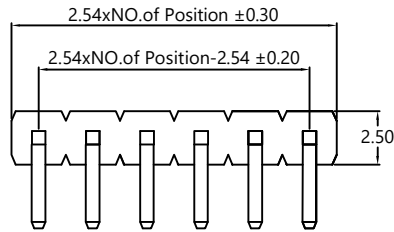


P.C.B Layout

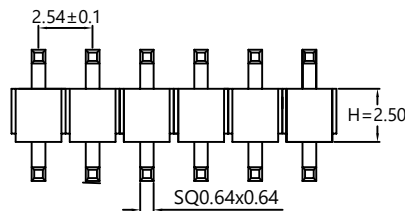

Ordering Information

PH254H250 WRU-1xx G A 0 172



Dimension antitheses list

PW	PC	L	H
5.50	3.00	13.40	2.50

SCONDAR ELECTRONIC LTD
ENGINEER L110 APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YaoQ	2017.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO		NEW			X.X	±0.35	DESIGN	LYao	2017.06.12	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2017.06.13	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
					Angle	± 3'				PART NO.	PH254H250WRU-1xxGA0172	
					DIM	TOL				PROJ.	PH2.54 H2.50 RT U shape Gold flash PA6T 1xxP Pin header	