
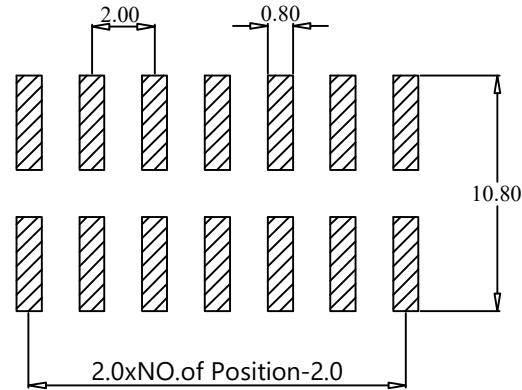


RoHS

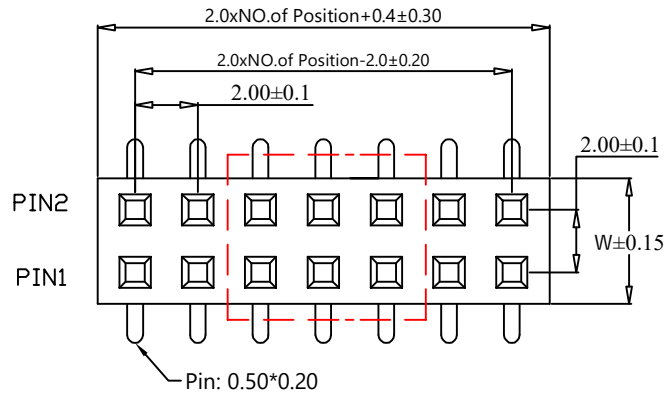

P.C.B Layout

SPECIFICATION:

- Current Rating: 1.5Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
 - Black Contacts: Brass

Ordering Information

FH200HxxxSMT -2xx Wxxx G A 1 301

400=4.00mm
 430=4.30mm
 460=4.60mm



No. of Pins
 220=2x20PIN

400=4.00
 450=4.50

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2μ"
 G10=Gold 10μ"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

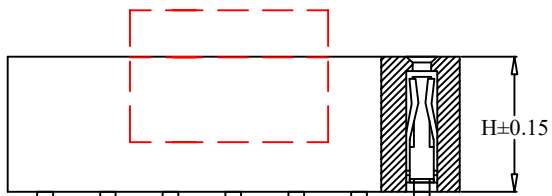

H	W	PW	L
4.00	4.00	6.50	4.30
4.30	4.00	6.50	4.60
4.60	4.00	6.50	4.90

SCONDAR ELECTRONIC LIMITE
ENGINEER YAO APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	LYao	2016.05.10	SCALE	-	UNIT	mm	SIZE	A4	SHEET	1/1	PART NO.	FH200HxxxSMT-2xxWxxxGA1301
A0	2021.06.18	NEW			X.X	±0.35												
					X.XX	±0.25												
					X.XXX	±0.15												
					Angle	± 3'												
					DIM	TOL												



SCONDAR ELECTRONIC LIMITED

TITLE: FH2.0 SMT Gold flash PA6T 2xxP Female header With pole