

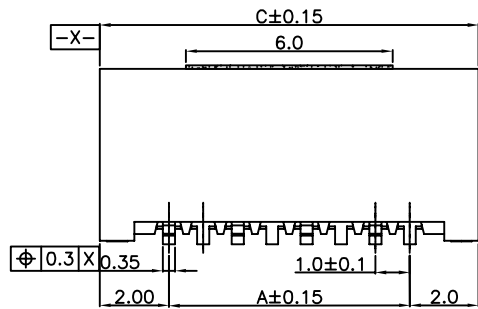



RoHS

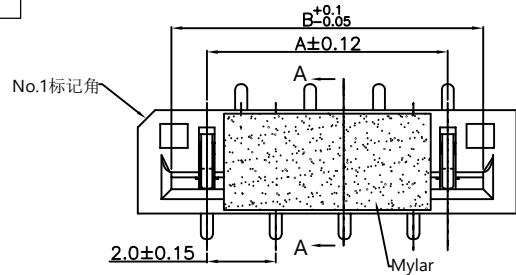




SPECIFICATION:

- Rated Current: 0.5A
- Rated voltage: 125V AC
- Insulation Resistance: 100MΩ Min
- Withstand voltage: 500VAC (1Min)
- Contact resistance: 30mΩ (Max)
- Working temperature: -25°C to +85°C

Material:

- Housing: PA6T (UL94V-0) Beige
- Mylar: 3*6mm
- Contact: Phosphor Bronze
- Plating: Surface nickel plating, followed by Tin plating

Ordering Information

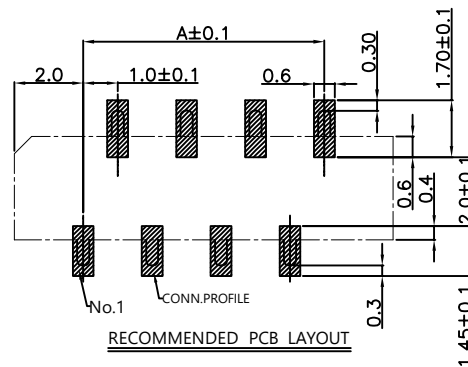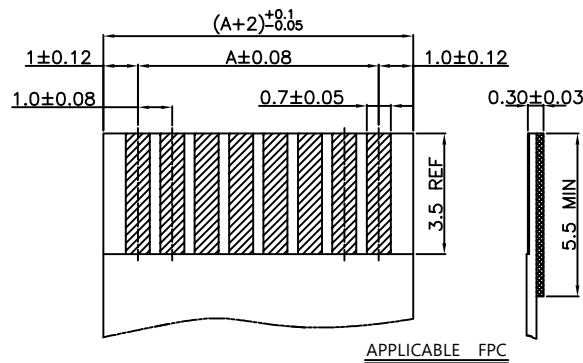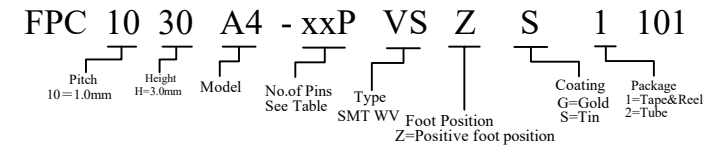

PIN	Dim A	Dim B	Dim C
5	4.00	6.05	8.00
6	5.00	7.05	9.00
8	7.00	9.05	11.00
9	8.00	10.05	12.00
10	9.00	11.05	13.00
11	10.00	12.05	14.00
13	12.00	14.05	16.00
15	14.00	16.05	18.00
16	15.00	17.05	19.00
19	18.00	20.05	22.00
23	22.00	24.05	26.00
30	29.00	31.05	33.00

		SCONDAR ELECTRONIC, LTD ENGINEER XJ2411		OPERATION		DRAW	Yao	2021.06.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
				X.X	±0.35				DESIGN	Lisa			2021.06.09
				X.XX	±0.25	CHECK	APPROVE	SHEET					
A0	2021.06.15			NEW				Angle	± 3'	PROJ.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL						