
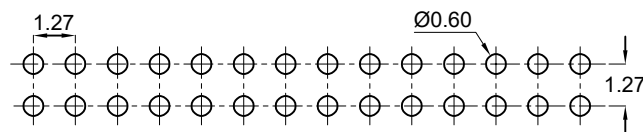

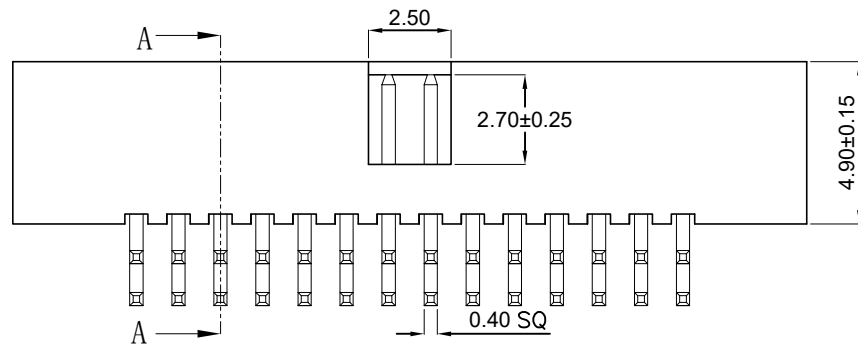


RoHS

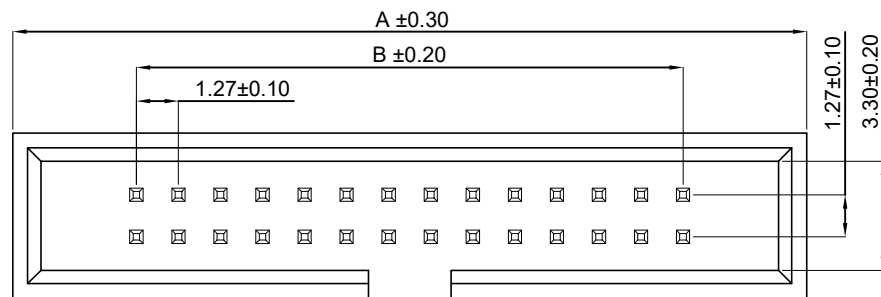

Recommended PCB Board Layout

SPECIFICATION:

- Current Rating: 1A AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Contact resistance: 30mΩ(Max).
 - Withstanding Voltage: 500VAC(1Min)
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing): PA6T + 30%Glass Fiber Polyester (UL94-V0)
 - Contact Material: Brass
 - Contact Plated : AU or Sn Over Ni

Ordering Information

BH127H 490 RT - 2xx G XX A 3 302

Insulator height 490=4.90mm
 PTYE RT=90°
 No.of Pins 210=2x10Pin
 Plating G=Gold Plated S=Tin Plated
 Color BK=black GR=Gray
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimensions		PIN
A	B	
12.55	5.08	2x5
15.09	7.62	2x7
16.36	8.89	2x8
18.90	11.43	2x10
22.71	15.24	2x13
25.25	17.78	2x15
27.79	20.32	2x17
31.70	24.13	2x20
38.05	30.48	2x25
44.30	36.83	2x30

SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

OPERATION		DRAW			SCALE
X. X	±0.30	DESIGN	YaoQ	2016.06.15	—
X. XX	±0.20	CHECK	Lisa	2016.06.18	mm
X. XXX	±0.10	APPROVE			A4
Angle	±3°				SHEET 1/1
DIM	TOL				Part No.



SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.	TITLE:
AO	2016.06.18	NEW							BH127H490RT-2xxGXXA3302
									BH1.27 H=4.90 2xXXPin Gold PA6T RT Box Header