
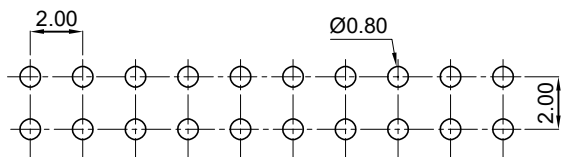

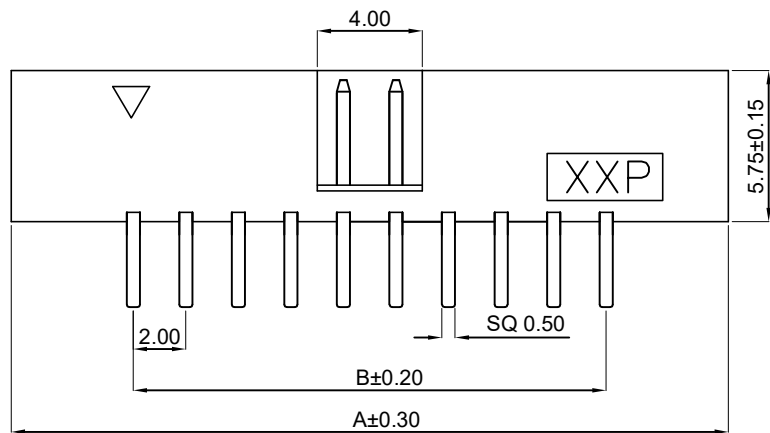


RoHS

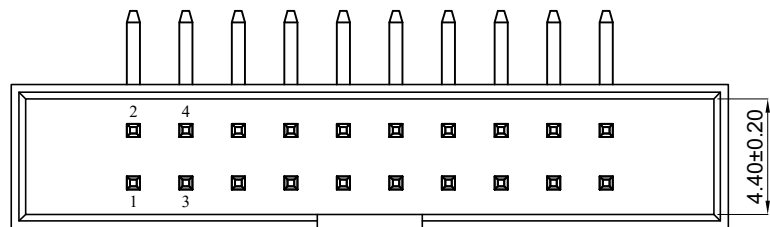

Recommended PCB Board Layout

**SPECIFICATION:**  
 Current Rating: 2A AC,DC  
 Contact Resistance: 20mΩ Max  
 Withstanding: 500V AC  
 Insulator Resistance: 1000mΩ Min  
 Operating Temp: -40°C~+105°C  
 Insulator Material: PA6T+30% Glass Filled, Polyester(UL94V-0)  
 Contact Plating: Au or Sn Over Ni  
 Contact Material: Brass

**Ordering Information**

**BH200H 575 RT - 2xx G XX A 3 302**

Insulator height 575=5.75mm  
 PTYE RT=90°  
 No. of Pins 210=2x10PIN  
 Plating G=Gold Plated S=Tin Plated  
 Color BK=black GR=Gray  
 Material A=PA6T  
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimensions		PIN	Dimensions		PIN
A	B		A	B	
13.30	4.00	2x3	31.30	22.00	2x12
15.30	6.00	2x4	33.30	24.00	2x13
17.30	8.00	2x5	37.30	28.00	2x15
19.30	10.00	2x6	41.30	32.00	2x17
21.30	12.00	2x7	47.30	38.00	2x20
23.30	14.00	2x8	51.30	42.00	2x22
25.20	16.00	2x9	57.30	48.00	2x25
27.30	18.00	2x10	67.30	58.00	2x30
29.30	20.00	2x11	71.30	62.00	2x32

**SCONDAR ELECTRONIC LIMITED**  
**ENGINEER YAO APPROVED**

OPERATION	DRAW	YaoQ	2016.06.15
X. X ±0.30	DESIGN	Lyao	2016.06.16
X. XX ±0.20	CHECK	Lisa	2016.06.18
X. XXX ±0.10	APPROVE		



SCONDAR ELECTRONIC LIMITED

AO	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	DIM	TOL	APPROVE
	2016.06.18	NEW			±3°			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE				

SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
—	mm	A4	1/1	Part No.	BH200H575RT-2xxGXXA3302
					BH12.00 H=5.75 2xxXPIn Gold PA6T RT Box Header