
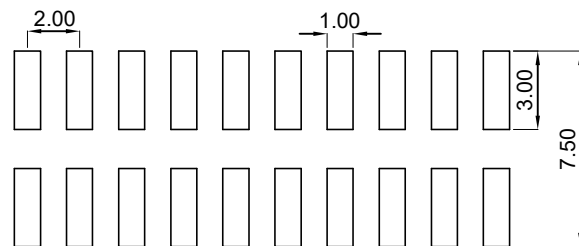

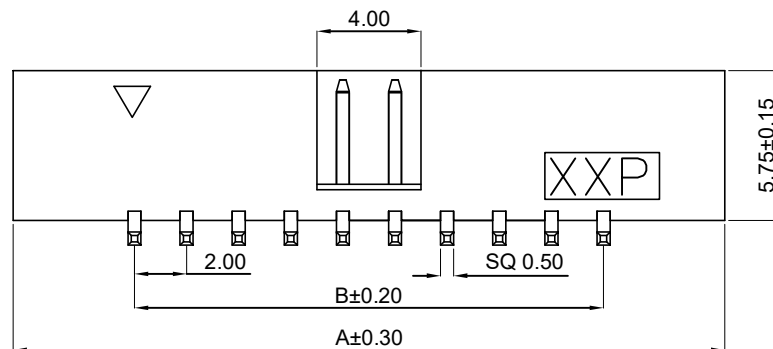


RoHS

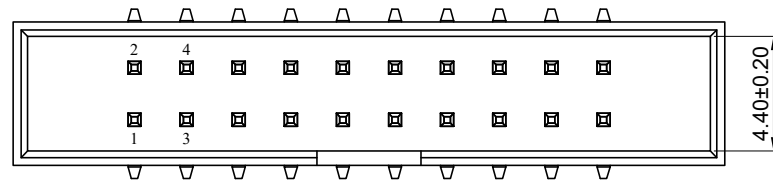

Recommended PCB Board Layout

SPECIFICATION:

Current Rating: 2A AC,DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC
 Insulator Resistance: 1000mΩ Min
 Operating Temp: -40°C~+105°C
 Insulator Material: PA6T+30% Glass Filled, Polyester(UL94V-0)
 Contact Plating: Au or Sn Over Ni
 Contact Material: Brass

Ordering Information

BH200H 575 SMT - 2xx G XX A 1 302

Insulator height 575=5.75mm
 PTYE SMT=PATCH
 No. of Pins 210=2x10PIN
 Plating G=Gold Plated S=Tin Plated
 Color BK=black GR=Gray
 Material A=PA6T
 Package 0=PE Bag 1=Tapco&Reel 2=Tube 3=Tray

Dimensions		PIN	Dimensions		PIN
A	B		A	B	
13.30	4.00	2x3	31.30	22.00	2x12
15.30	6.00	2x4	33.30	24.00	2x13
17.30	8.00	2x5	37.30	28.00	2x15
19.30	10.00	2x6	41.30	32.00	2x17
21.30	12.00	2x7	47.30	38.00	2x20
23.30	14.00	2x8	51.30	42.00	2x22
25.20	16.00	2x9	57.30	48.00	2x25
27.30	18.00	2x10	67.30	58.00	2x30
29.30	20.00	2x11	71.30	62.00	2x32

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

OPERATION	DRAW	YaoQ	2016.06.15
X.X ±0.30	DESIGN	Lyao	2016.06.16
X.XX ±0.20	CHECK	Lisa	2016.06.18
X.XXX ±0.10	APPROVE		
Angle ±3°			
DIM TOL			

SCONDAR
 SCONDAR ELECTRONIC LIMITED

SCALE	UNIT	SIZE	SHEET	Part No.	BH200H575SMT-2xxGXXA1302
—	mm	A4	1/1	TITLE:	BH12.00 H=5.75 2xxPIN Gold PA6T SMT Box Header

AO	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
	2016.06.18	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE