


RoHS

受控

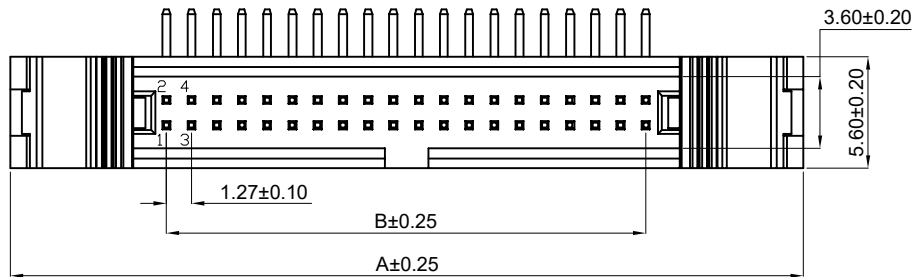




SPECIFICATION:

Current Rating: 1A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

Ordering Information



EH 127 LH 210 RT - 2xx BK G D 3 S 503

Type LH=Low height Plastic height 210=2.10mm No. of Pins 210=2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch Plating G=Gold Plated S=Tin Plated

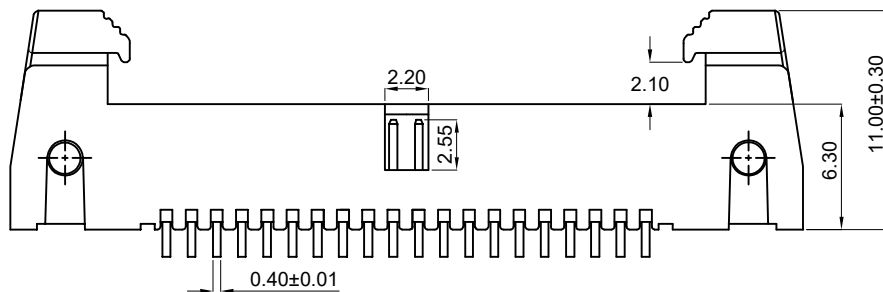

P. C. B LAYOUT

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	18.31	2.54
2x4	19.58	3.81
2x5	20.85	5.08
2x6	22.12	6.35
2x7	23.39	7.62
2x8	24.66	8.89
2x9	25.93	10.16
2x10	27.20	11.42
2x12	29.74	13.97
2x13	31.01	15.24
2x15	33.55	17.78
2x17	36.09	20.32
2x20	39.90	24.13
2x25	46.25	30.48
2x30	52.60	36.83
2x32	55.14	39.37

		SCONDAR ELECTRONIC LIMITED ENGINEER YAO APPROVED		OPERATION		DRAW	YAO	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
				X. X	±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm		
				X. XX	±0.25				CHECK	Lisa		2016.06.08
AO	2016.06.08	NEW		X. XXX	±0.15	APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.		TITLE:	EH1.27 LH=2.1 H=11.00 2xXXPin Gold PBT BK RT Box Header (低耳牛角配两件式IDC)