
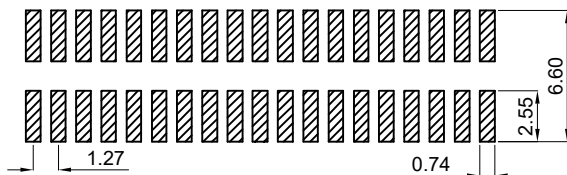

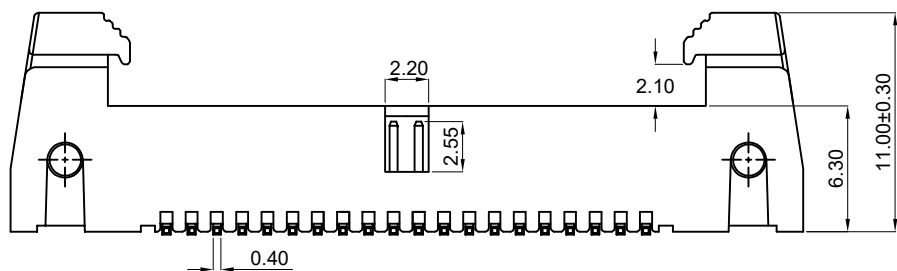


RoHS

受控

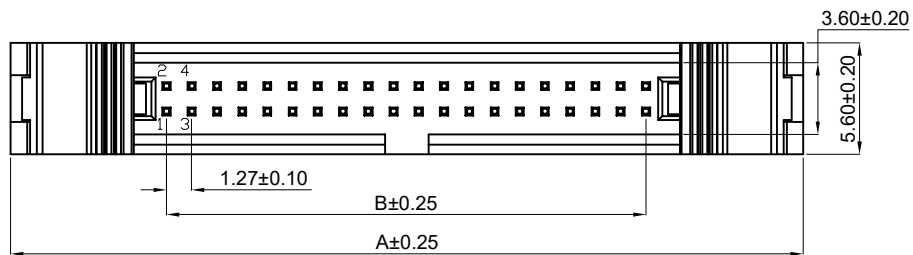

P. C. B LAYOUT

SPECIFICATION:

Current Rating: 1A AC,DC  
 Contact Resistance: 20mΩ Max  
 Withstanding: 500V AC for 1Min  
 Insulator Resistance: 1000mΩ Max,  
 Operating Temp: -40° C~+105° C  
 Insulator Material: PBT, UL94V-0  
 Contact Plating: Flash Gold  
 Contact Material: Brass

Ordering Information

EH 127 LH 210 SMT - 2xx BK G D 3 S 503

Type LH=Low height  
 Plastic height 210=2.10mm  
 No. of Pins 210=2x10PIN  
 Colour BK=Black GR=Gray  
 Material D=PBT  
 Package 3=Tray  
 Latching form S=Short Latch  
 Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	18.31	2.54
2x4	19.58	3.81
2x5	20.85	5.08
2x6	22.12	6.35
2x7	23.39	7.62
2x8	24.66	8.89
2x9	25.93	10.16
2x10	27.20	11.42
2x12	29.74	13.97
2x13	31.01	15.24
2x15	33.55	17.78
2x17	36.09	20.32
2x20	39.90	24.13
2x25	46.25	30.48
2x30	52.60	36.83
2x32	55.14	39.37

SCONDAR ELECTRONIC LIMITE  
 ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2016.06.06	SCALE	—
					X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
					X.XX ±0.25				SIZE	A4
					X.XXX ±0.15				CHECK	Lisa
AO	2016.06.08	NEW			Angle ±3°	APPROVE			PART NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			TITLE:	

SCONDAR ELECTRONIC LIMITED

EH127LH210SMT-2xxBKGD3S503

EH1.27 LH=2.1 H=11.00 2xXXPin Gold PBT BK SMT Box Header (低耳牛角配两件式IDC)