
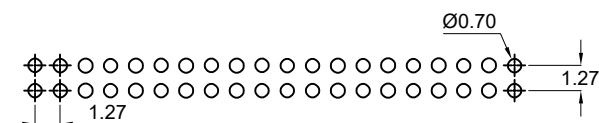

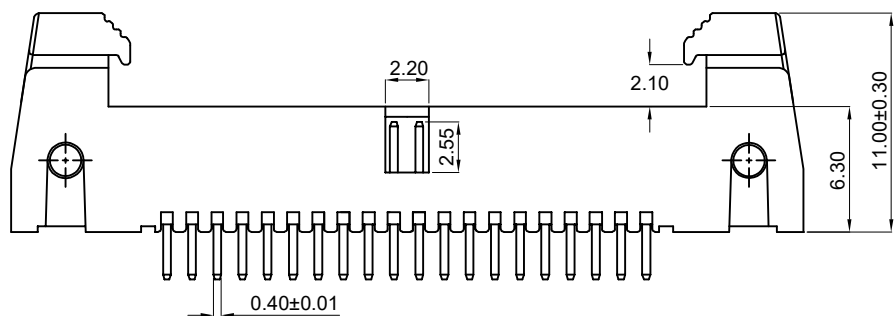


RoHS

受控

SPECIFICATION:

Current Rating: 1A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

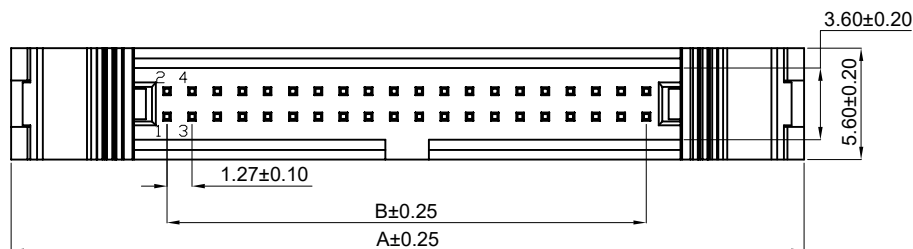

P. C. B LAYOUT

Ordering Information


EH 127 LH 210 ST - 2xx BK G D 3 S 503

Type LH=Low height Plastic height 210=2.10mm No. of Pins 210=2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	18.31	2.54
2x4	19.58	3.81
2x5	20.85	5.08
2x6	22.12	6.35
2x7	23.39	7.62
2x8	24.66	8.89
2x9	25.93	10.16
2x10	27.20	11.42
2x12	29.74	13.97
2x13	31.01	15.24
2x15	33.55	17.78
2x17	36.09	20.32
2x20	39.90	24.13
2x25	46.25	30.48
2x30	52.60	36.83
2x32	55.14	39.37

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

OPERATION	DRAW	YAO	2016.06.06	SCALE	—
X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
X.XX ±0.25				SIZE	A4
X.XXX ±0.15	CHECK	Lisa	2016.06.08	SHEET	1/1
Angle ±3°	APPROVE			PART NO.	
DIM TOL				PROJ.	⊕



SCONDAR ELECTRONIC LIMITED

AO	2016.06.08	NEW	—	—
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

EH127LH210ST-2xxBKGD3S503
 EH1.27 LH=2.1 H=11.00 2xXXPin Gold PBT BK ST Box Header (低耳牛角配两件式IDC)