

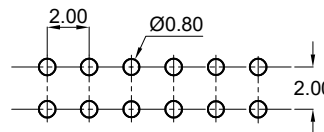
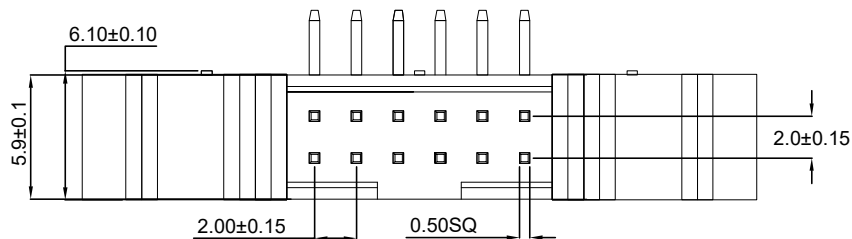


RoHS

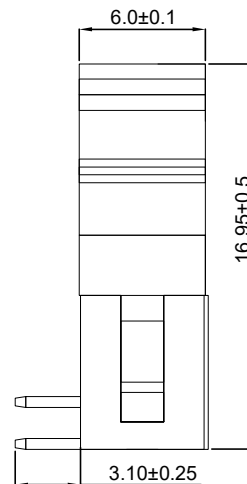

P. C. B LAYOUT

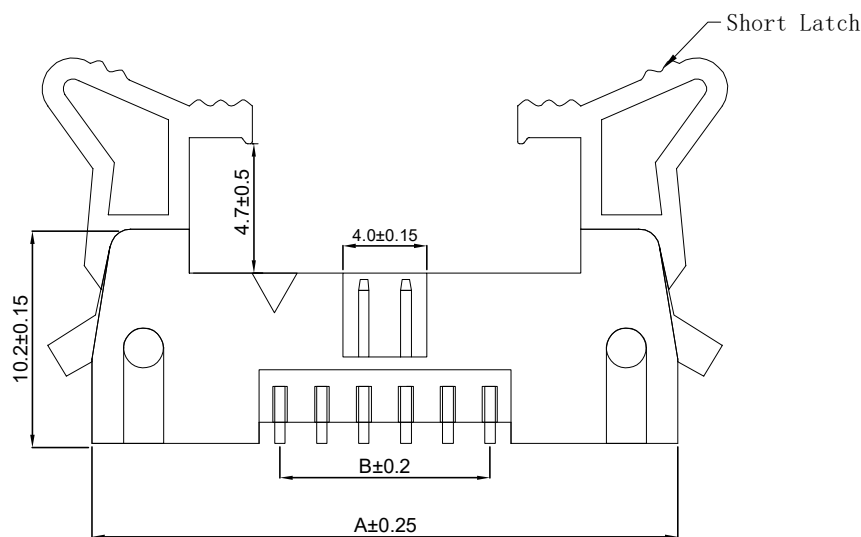

SPECIFICATION:

Current Rating: 2A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

Ordering Information

EH 200 LH 470 RT - 2xx BK G D 3 S 503

Type LH=Low height Plastic height 470-4.70mm No. of Pins 210-2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	21.92	4.00
2x4	23.92	6.00
2x5	25.92	8.00
2x6	27.92	10.00
2x7	29.92	12.00
2x8	31.92	14.00
2x10	35.92	18.00
2x12	39.92	22.00
2x13	41.92	24.00
2x15	45.92	28.00
2x17	49.92	32.00
2x20	55.92	38.00
2x22	59.92	42.00
2x25	65.92	48.00
2x30	75.92	58.00
2x32	79.92	62.00

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

AO	2016.06.08	NEW			OPERATION	DRAW	YAO	2016.06.06	SCALE	—
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
					X.XX ±0.25	CHECK	Lisa	2016.06.08	SIZE	A4
					X.XXX ±0.15	APPROVE			SHEET	1/1
					Angle ±3°				PART NO.	
					DIM TOL				TITLE:	

SCONDAR
 SCONDAR ELECTRONIC LIMITED

EH200LH470RT-2XXBKGD3S503
 EH2.00 LH=4.7 H=16.95 2XXPin Gold PBT BK RT Box Header (低耳牛角配两件式IDC)