


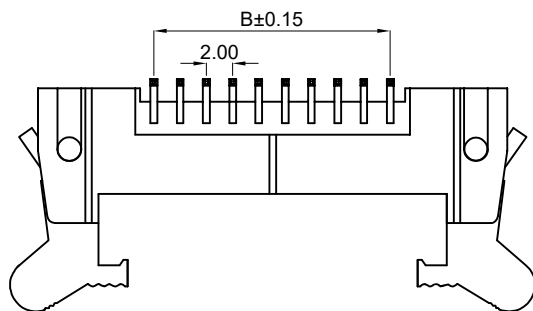
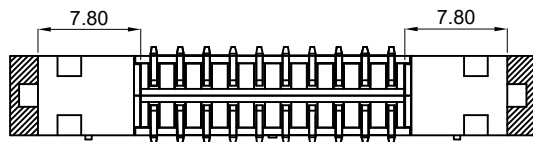


RoHS



P. C. B LAYOUT

SPECIFICATION:

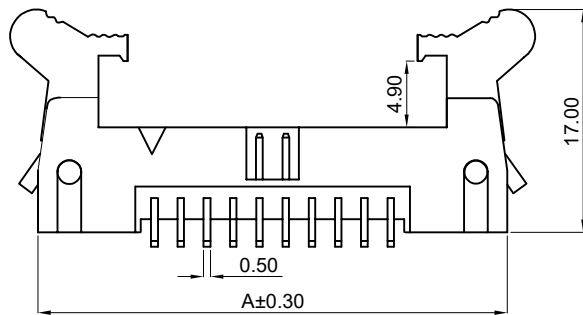

Current Rating: 2A AC,DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PA6T, UL94V-0
 Contact Plating: Gold flash over niakel
 Contact Material: Brass

Ordering Information

EH 200 LH 490 SMT - 2xx BK G A 3 S 503

Type LH=Low height Plastic height 490-4.90mm No. of Pins 210-2x10PIN Colour BK=Black GR=Gray Material A=PA6T Package 3=Tray Latching form S=Short Latch Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	21.60	4.00
2x4	23.60	6.00
2x5	25.60	8.00
2x6	27.60	10.00
2x7	29.60	12.00
2x8	31.60	14.00
2x10	35.60	18.00
2x12	39.60	22.00
2x13	41.60	24.00
2x15	45.60	28.00
2x17	49.60	32.00
2x20	55.60	38.00
2x22	59.60	42.00
2x25	65.60	48.00
2x30	75.60	58.00

		SCONDAR ELECTRONIC LIMITE ENGINEER YAO APPROVED		OPERATION		DRAW	YAO	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
				X. X	±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm		
				X. XX	±0.25				SIZE	A4		
A0	2016.06.08	NEW		X. XXX	±0.15	CHECK	Lisa	2016.06.08	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle			PROJ.		TITLE:	EH2.00 LH=4.9 H=17.00 2xXXPin Gold PA6T BK SMT Box Header (低耳牛角配两件式IDC)
				DIM	TOL	APPROVE						