


RoHS

受控

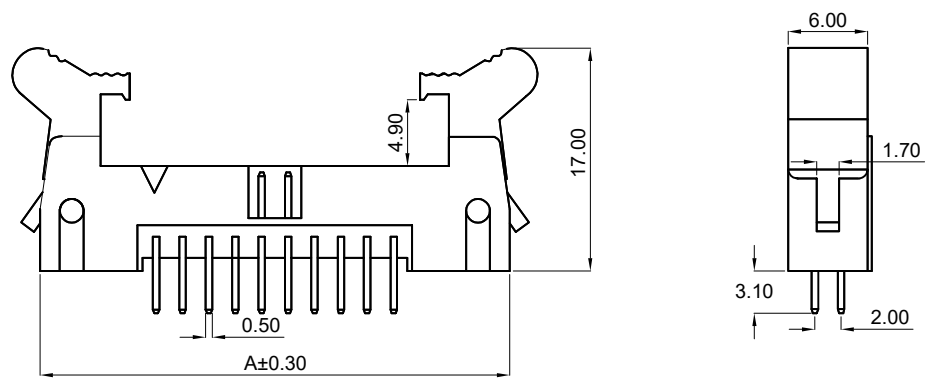


SPECIFICATION:
 Current Rating: 2A AC,DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PA6T, UL94V-0
 Contact Plating: Gold flash over niakel
 Contact Material: Brass

Ordering Information


EH 200 LH 490 ST - 2xx BK G A 3 S 503

Type LH=Low height Plastic height 490~4.90mm No.of Pins 210~2x10PIN Colour BK=Black GR=Gray Material A=PA6T Package 3=Tray Latching form S=Short Latch

Plating G=Gold Plated S=Tin Plated

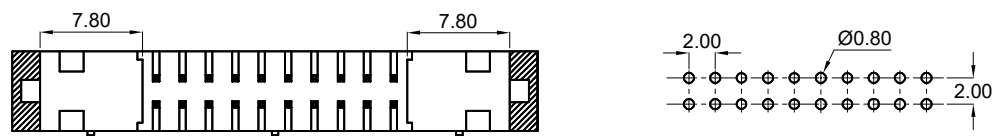

P. C. B LAYOUT

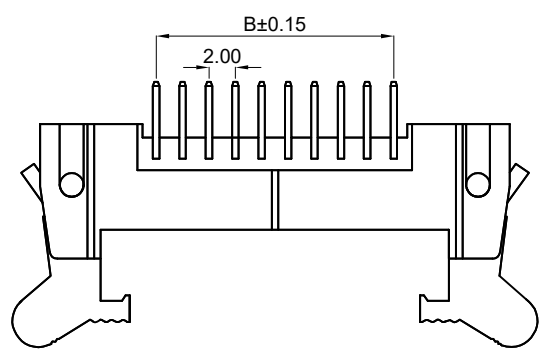

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	21.60	4.00
2x4	23.60	6.00
2x5	25.60	8.00
2x6	27.60	10.00
2x7	29.60	12.00
2x8	31.60	14.00
2x10	35.60	18.00
2x12	39.60	22.00
2x13	41.60	24.00
2x15	45.60	28.00
2x17	49.60	32.00
2x20	55.60	38.00
2x22	59.60	42.00
2x25	65.60	48.00
2x30	75.60	58.00

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm		
					X.XX ±0.25	CHECK	Lisa	2016.06.08	SIZE	A4		
					X.XXX ±0.15	APPROVE			SHEET	1/1		
AO	2016.06.08	NEW			Angle ±3°				PART NO.		EH200LH490ST-2XXBKA3S503	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			PROJ.		TITLE:	EH2.00 LH=4.9 H=17.00 2xXXPin Gold PA6T BK ST Box Header (低耳牛角配两件式IDC)