



RoHS

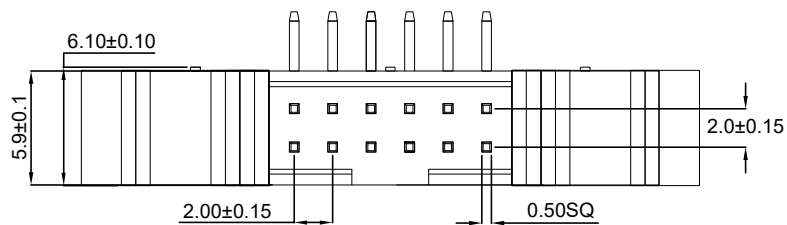

P. C. B LAYOUT



SPECIFICATION:

Current Rating: 2A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

Ordering Information

EH 200 MH 870 RT - 2xx BK G D 3 L 503

Type: MH=Male height
 Plastic height: 870=8.70mm
 No. of Pins: 210=2x10PIN
 Colour: BK=Black, GR=Gray
 Material: D=PBT
 Package: 3=Tray
 Latching form: L=Long Latch
 Plating: G=Gold Plated, S=Tin Plated

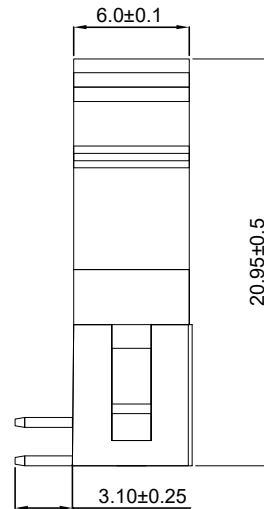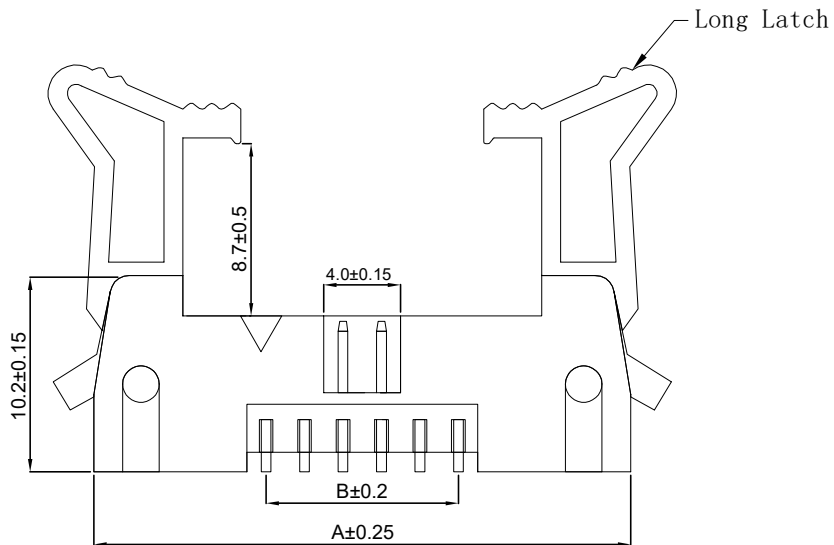

NUMBER OF POSITIONS	DIMENSION	
	A	B
2x3	21.92	4.00
2x4	23.92	6.00
2x5	25.92	8.00
2x6	27.92	10.00
2x7	29.92	12.00
2x8	31.92	14.00
2x10	35.92	18.00
2x12	39.92	22.00
2x13	41.92	24.00
2x15	45.92	28.00
2x17	49.92	32.00
2x20	55.92	38.00
2x22	59.92	42.00
2x25	65.92	48.00
2x30	75.92	58.00
2x32	79.92	62.00

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2016.06.06	SCALE	—
					X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
					X.XX ±0.25				SIZE	A4
					X.XXX ±0.15				SHEET	1/1
AO	2016.06.08				Angle ±3°	CHECK	Lisa	2016.06.08		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			PROJ.	TITLE:

SCONDAR
 SCONDAR ELECTRONIC LIMITED

EH200MH870RT-2XXBKGD3L503
 EH2.00 MH=8.70 H=20.95 2xXXPin Gold PBT BK RT Box Header (高耳牛角配三件式IDC)