


RoHS

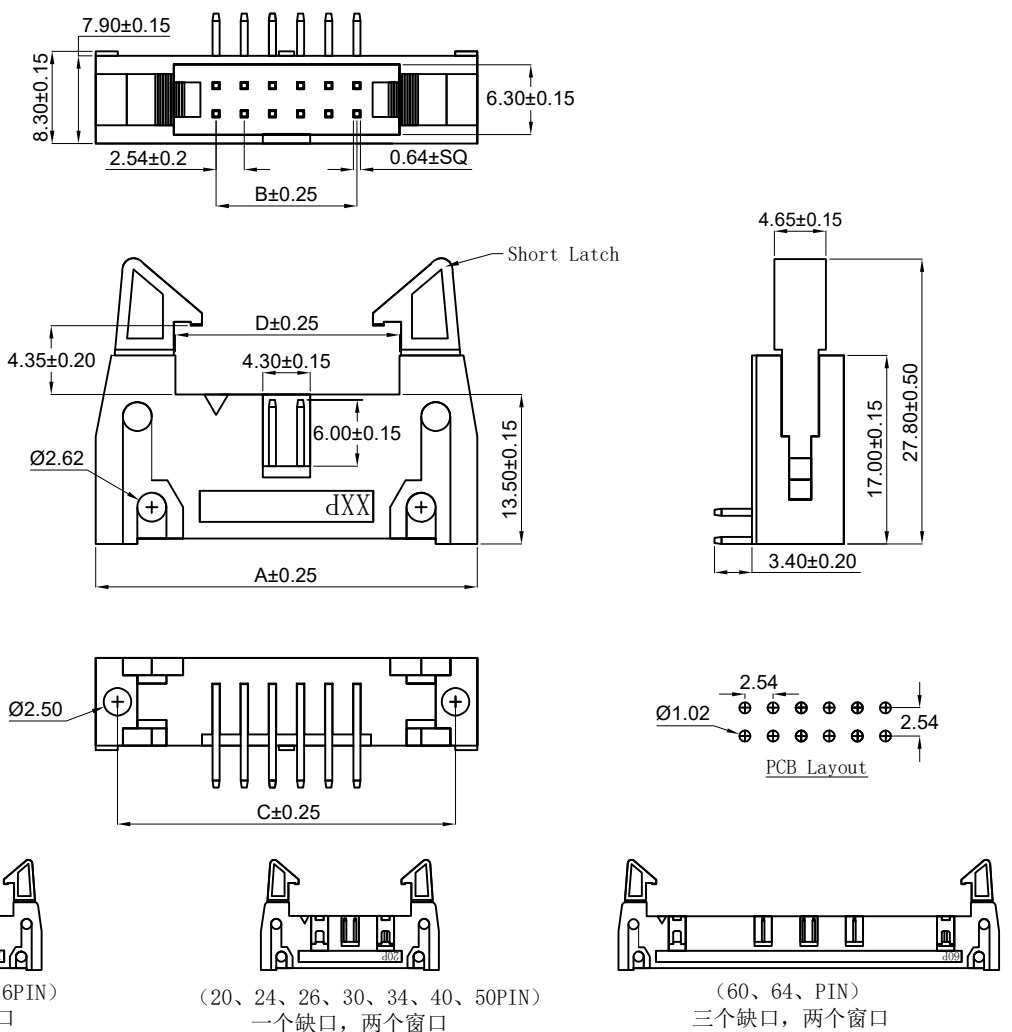

Technical Parameters:
 Rated current: 3A AC/DC
 Withstand voltage: 550V AC/minute
 Insulation resistance: $\geq 1000\Omega$ min
 Contact resistance: $\leq 20\Omega$ MAX
 Soldering temperature: +220°C, 10s max
 Insulator Material: PBT+30%G.F
 Contact Material: Brss
 Contact Plating: Gold Flash
 Insulator material: Black polyester
 U194V-0

Ordering Information

EH 254 LH 435 RT - 2xx BK G D 3 S 503

Type LH=Low height Plastic height 435=4.35mm No. of Pins 210=2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch
 Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION			
	A	B	C	D
2X5	32.00	10.16	27.94	17.82
2X7	34.54	12.70	33.02	22.90
2X8	39.62	17.78	35.56	25.44
2X10	44.60	22.86	39.70	30.52
2X12	49.78	27.94	45.72	35.60
2X13	52.32	30.48	48.26	38.14
2X15	57.40	35.56	53.34	43.22
2X17	62.48	40.64	58.42	48.30
2X20	70.10	48.26	66.04	55.92
2X25	82.80	60.96	78.74	68.62
2X30	95.50	73.66	91.44	81.32
2X32	100.58	78.74	96.72	86.40

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

OPERATION	DRAW	YAO	2016.06.06	SCALE	—
X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
X.XX ±0.25				SIZE	A4
X.XXX ±0.15	CHECK	Lisa	2016.06.06	SHEET	1/1
Angle ±3°	APPROVE			PART NO.	
DIM TOL				PROJ.	

SCONDAR
 SCONDAR ELECTRONIC LIMITED
 PART NO. EH254LH345RT-2XXBKGD3S503
 Title: EH2.54 LH=3.45 H=27.80 2xXXPin Gold PBT BK RT Box Header (低耳牛角配两件式IDC)

AO	2016.06.06	NEW			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	