
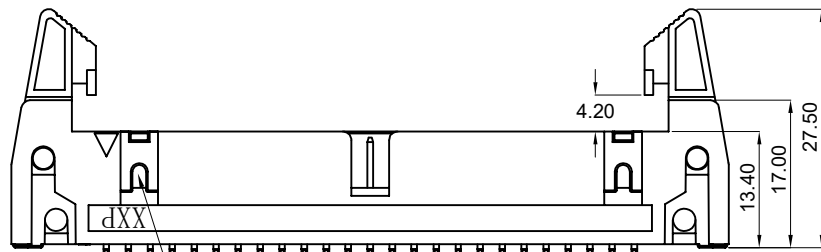





RoHS

受控

Technical Parameters:
 Rated current: 3A AC/DC
 Withstand voltage: 500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20MΩ MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL94V-0
 Contact Plating: Gold flash over niakel
 Contact Material: Brsss

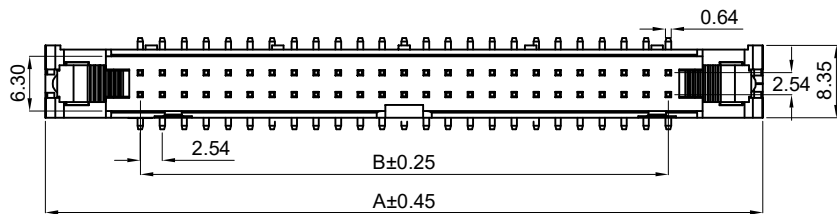

This heat dissipation hole is not available at 16P or below

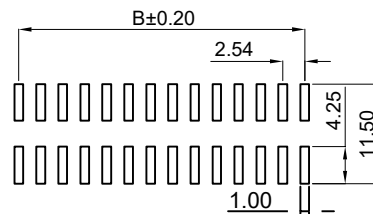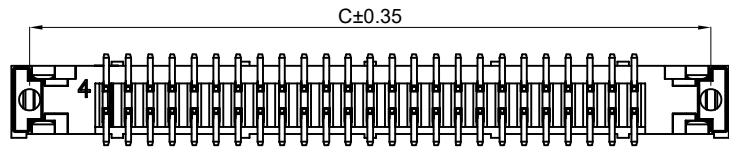

P. C. B LAYOUT

Ordering Information

EH 254 LH 420 SMT - 2xx BK G D 3 S 503

Type MH=Mated height Plastic height 420=4.20mm No. of Pins 210=2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch
 Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
2X3	26.92	5.08	22.86
2X4	29.46	7.62	25.40
2X5	32.00	10.16	27.94
2X6	34.54	12.70	30.48
2X7	37.08	15.24	33.02
2X8	39.62	17.78	35.56
2X10	44.70	22.86	40.64
2X12	49.78	27.94	45.72
2X13	52.32	30.48	48.26
2X15	57.40	35.56	53.34
2X17	62.48	40.64	58.42
2X20	70.10	48.26	66.04
2X25	82.80	60.96	78.74
2X30	95.50	73.66	91.44
2X32	100.58	78.74	96.52

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2016.06.06	SCALE	—	<p>SCONDAR ELECTRONIC LIMITED</p>	
					X. X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm		
					X. XX ±0.25	CHECK	Lisa	2016.06.06	SIZE	A4		
					X. XXX ±0.15	APPROVE			SHEET	1/1		
AO	2016.06.06	NEW			Angle ±3°				PART NO.		EH254LH420SMT-2XXBKGD3S503	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE			PROJ.	⊕	TITLE:	EH2.54 LH=4.20 H=27.50 2xXPin Gold PBT BK RT Box Header (低耳牛角配两件式IDC)