
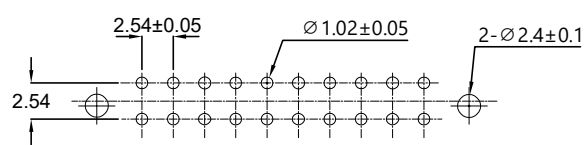
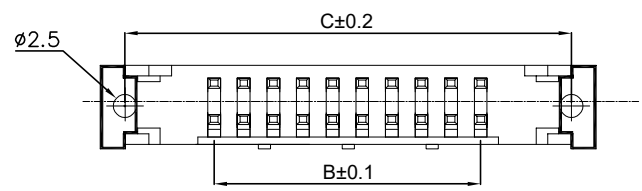
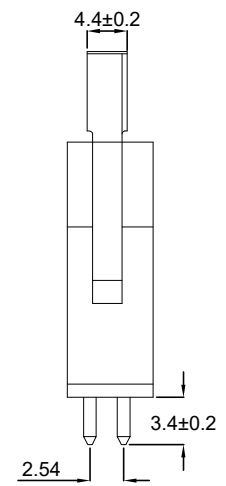
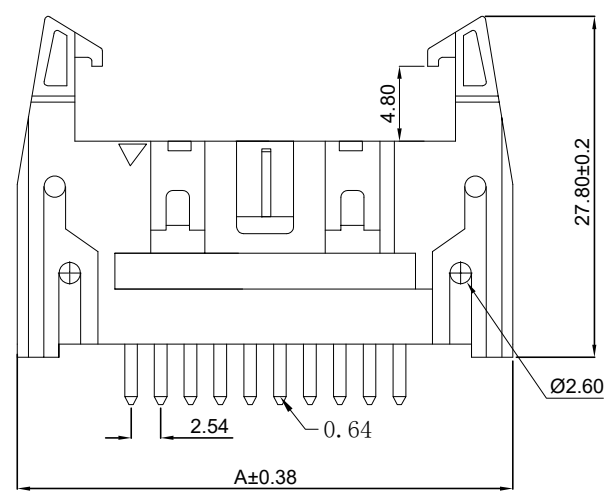


RoHS

受控



P. C. B LAYOUT

SPECIFICATION:
 Current Rating: 3A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC for 1Min
 Insulator Resistance: 1000mΩ Max,
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass

Ordering Information

EH 254 LH 480 ST - 2xx BK G D 3 S 503
 Type LH=Low height Plastic height 480=4.80mm No.of Pins 210=2x10Pin Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form S=Short Latch
 Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
2X5	32.00	10.16	27.94
2X7	34.54	12.70	33.02
2X8	39.62	17.78	35.56
2X10	44.60	22.86	39.70
2X12	49.78	27.94	45.72
2X13	52.32	30.48	48.26
2X15	57.40	35.56	53.34
2X17	62.48	40.64	58.42
2X20	70.10	48.26	66.04
2X25	82.80	60.96	78.74
2X30	95.50	73.66	91.44
2X32	100.58	78.74	96.72

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE
AO	2016.06.08	NEW			X.X ±0.35	YAO	—
					X.XX ±0.25	Xiong	UNIT mm
					X.XXX ±0.15	Lisa	SIZE A4
					Angle ±3°		SHEET 1/1
					DIM TOL		PART NO.
							TITLE:

SCONDAR
 SCONDAR ELECTRONIC LIMITED
 PART NO. EH254LH480ST-2XXBKGD3S503
 TITLE: EH2.54 LH=4.8 H=27.80 2XXPin Gold PBT BK ST Box Header (低耳牛角配两件式IDC)