



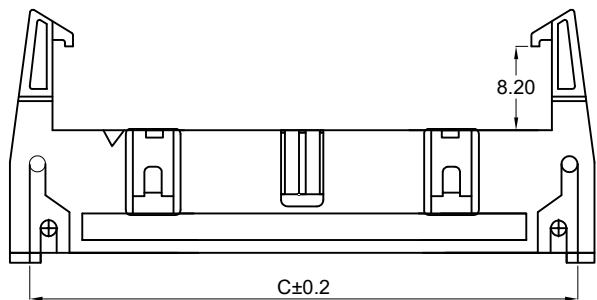


RoHS

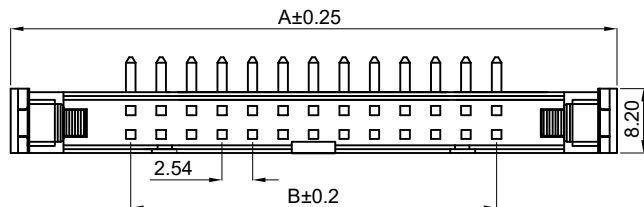

P. C. B LAYOUT

Technical Parameters:

Rated current: 3A AC/DC
 Withstand voltage: 500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20MΩ MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brss

Ordering Information

EH 254 MH 820 RT - 2xx BK G D 3 L 503

Type: MH=Mated height
 Plastic height: 820~8.20mm
 No. of Pins: 210~2x10PIN
 Colour: BK=Black, GR=Gray
 Material: D=PBT
 Package: 3=Tray
 Latching form: L=Long Latch
 Plating: G=Gold Plated, S=Tin Plated

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
2X5	32.00	10.16	27.94
2X7	34.54	12.70	33.02
2X8	39.62	17.78	35.56
2X10	44.60	22.86	39.70
2X12	49.78	27.94	45.72
2X13	52.32	30.48	48.26
2X15	57.40	35.56	53.34
2X17	62.48	40.64	58.42
2X20	70.10	48.26	66.04
2X25	82.80	60.96	78.74
2X30	95.50	73.66	91.44
2X32	100.58	78.74	96.72

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

OPERATION	DRAW	YAO	2016.06.06	SCALE	—
X.X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm
X.XX ±0.25				SIZE	A4
X.XXX ±0.15	CHECK	Lisa	2016.06.06	SHEET	1/1
Angle ±3°	APPROVE			PART NO.	
DIM TOL				PROJ.	

SCONDAR
 SCONDAR ELECTRONIC LIMITED

EH254MH820RT-2XXBKGD3L503
 EH2.54 MH=8.2 H=27.8 2xXPin Gold PBT BK RT Box Header (高耳牛角配三件式IDC)

AO	2016.06.06	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE