
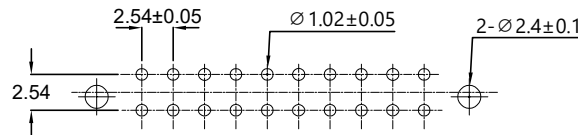
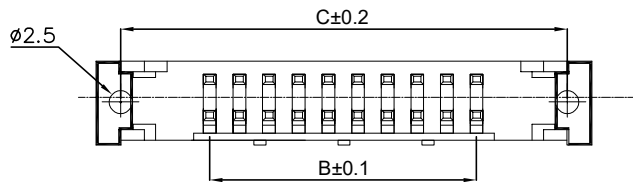
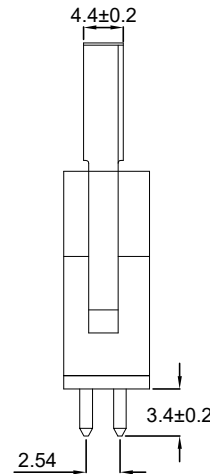
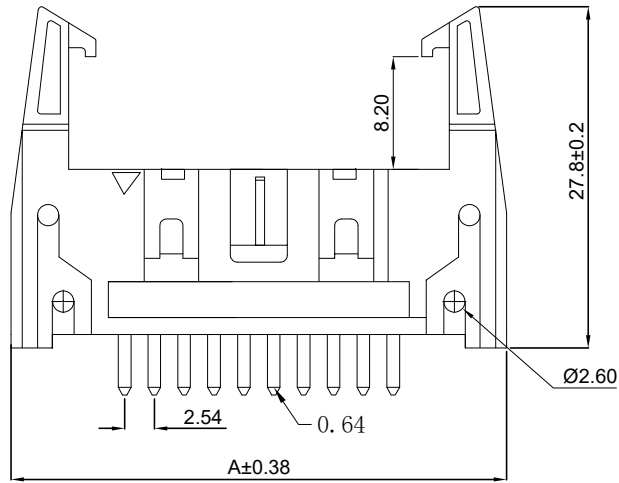


RoHS

受控



P. C. B LAYOUT

Technical Parameters:
 Rated current: 3A AC/DC
 Withstand voltage: 500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20MΩ MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brss

Ordering Information

EH 254 MH 820 ST - 2xx BK G D 3 L 503
Type MH=Mated height Plastic height 820=8.2mm No. of Pins 210=2x10PIN Colour BK=Black GR=Gray Material D=PBT Package 3=Tray Latching form L=Long Latch Plating G=Gold Plated S=Tin Plated

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
2X5	32.00	10.16	27.94
2X7	34.54	12.70	33.02
2X8	39.62	17.78	35.56
2X10	44.60	22.86	39.70
2X12	49.78	27.94	45.72
2X13	52.32	30.48	48.26
2X15	57.40	35.56	53.34
2X17	62.48	40.64	58.42
2X20	70.10	48.26	66.04
2X25	82.80	60.96	78.74
2X30	95.50	73.66	91.44
2X32	100.58	78.74	96.72

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X. X ±0.35	DESIGN	Xiong	2016.06.07	UNIT	mm	
					X. XX ±0.25	CHECK	Lisa	2016.06.06	SIZE	A4	
					X. XXX ±0.15	APPROVE			SHEET	1/1	
AO	2016.06.06				Angle ±3°				PART NO.		EH254MH820ST-2XXBKGD3L503
REV	DATE				DIM TOL				PROJ.	⊕	TITLE: EH2.54 MH=8.2 H=27.8 2xXXPin Gold PBT BK ST Box Header (高耳牛角配三件式IDC)