


RoHS

SPECIFICATION:

Current Rating: 1A AC, DC
 Voltage Rating: 250V AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 500V AC
 Insulation Resistance: 100mΩ Min
 Operating Temp: -40° C~+105° C
 Insulator Material: PBT, Glass Fiber UL94V-0
 Contact Plating: Gold or Tin Over Nickel Plated
 Contact Material: Phosphor bronze

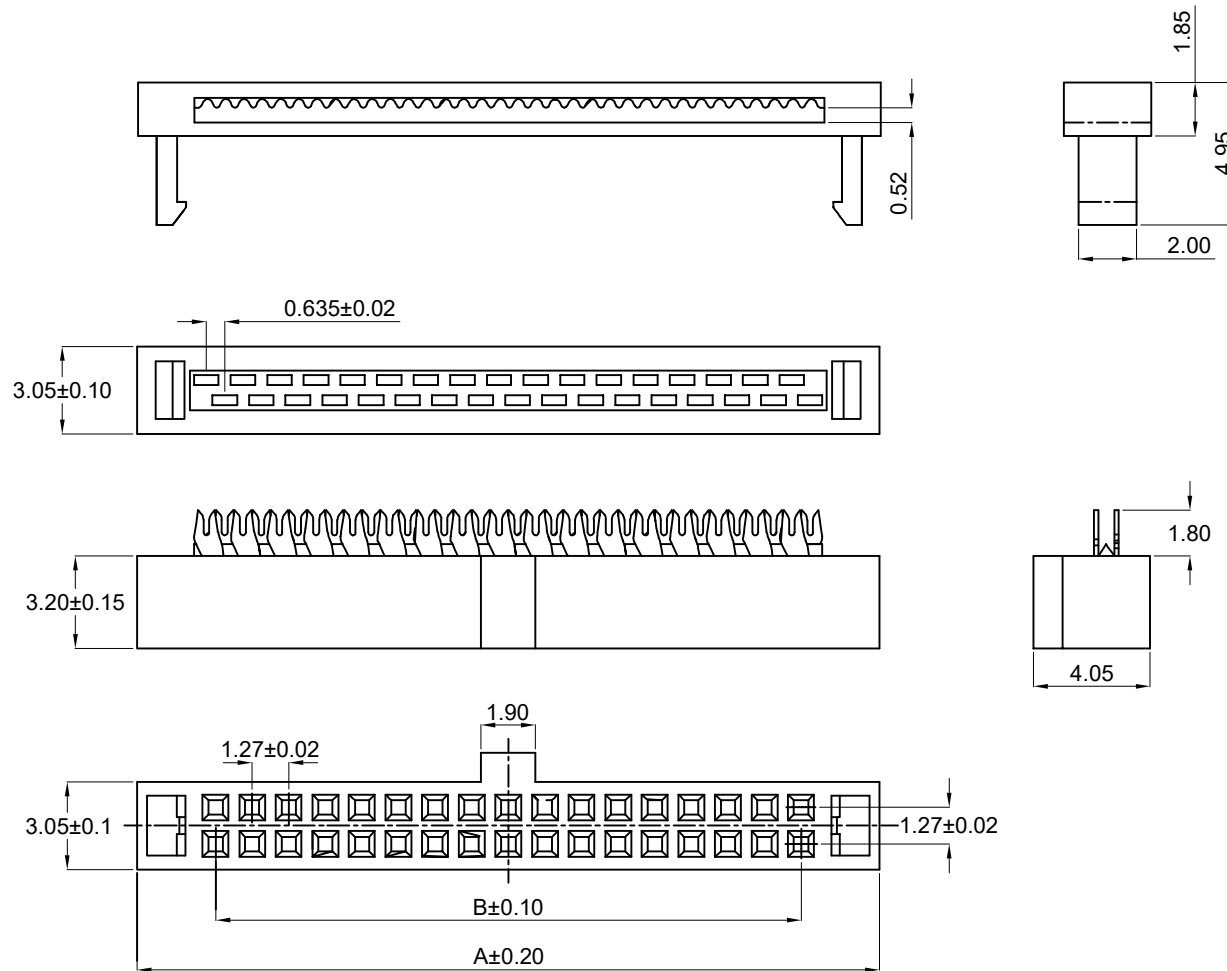

Ordering Information

IDC127N2 - 2xx X BK W D 3 303

Type: N2=2-piece
 No. of Pins: 210=2x10PIN
 Plating: G=Gold Plated, S=Tin Plated, N=Nickel plating
 Colour: BK=Black
 Material: D=PBT
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray
 W=With Bump, N=No Bump

Dimensions		PIN	Dimensions		PIN
A	B		A	B	
10.54	5.08	2x5	29.59	24.13	2X20
11.81	6.35	2x6	32.13	26.67	2X22
13.08	7.62	2x7	35.94	30.48	2X25
14.35	8.89	2x8	42.29	36.83	2X30
16.89	11.43	2x10	47.37	41.91	2X34
20.70	15.24	2x13	54.99	49.53	2X40
23.24	17.78	2x15	67.69	62.23	2X50
25.78	20.32	2x17			

SCONDAR ELECTRONIC LIMITED
 ENGINEER YAO APPROVED

OPERATION	DRAW	YANG	2016.06.06
X.X ±0.35	DESIGN	LYAO	2016.06.08
X.XX ±0.25	CHECK	Lisa	2016.06.08
X.XXX ±0.15	APPROVE		
Angle ±3°			
DIM TOL			



SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO	2016.06.08	NEW		

SCALE	UNIT	SIZE	SHEET	PART NO.	IDC127N2-2xxXBKWD3303
—	mm	A4	1/1		
PROJ.	TITLE:	IDC127 H=3.5 2xXXPin With Bump NO-SR PBT Black Tray IDC Socket			