
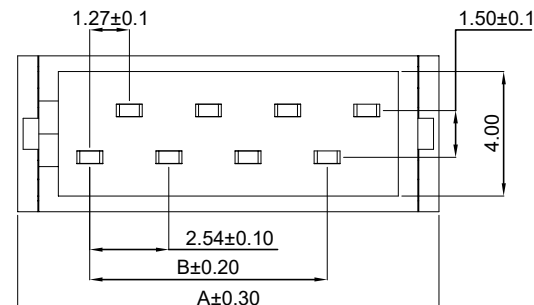


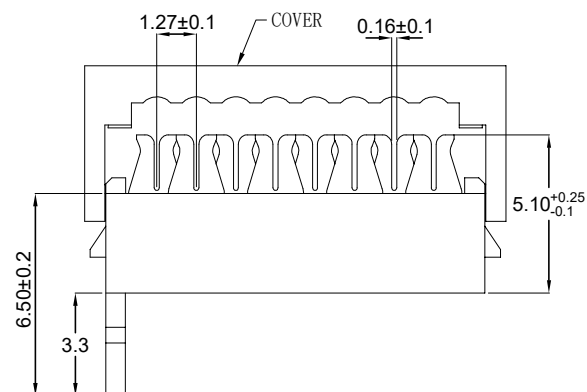


RoHS

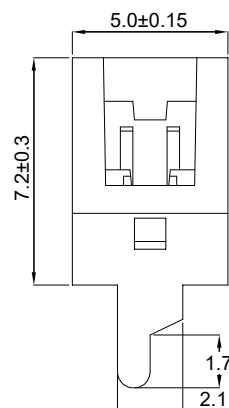

Combined height

TECHNICAL PARAMETERS:

Rated current: 1A AC/DC

Withstand voltage: 500V AC/minute

Insulation resistance: 1000MΩ min

Contact resistance: 20M MAX

Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Insulator Material:PBT Glass Fiber
UL 94V-0

Contact Plating :Sn Over Ni

Contact Material: Brass

Ordering Information

IDC 254 RD - 2xx S D 3 503

Colour
RD=Red

No. of Pins
210 = 2 x 10 PIN

Plating
N G=Gold Plated

Material
D=PBT

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

NUMBER OF POSITIONS	DIMENSION	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

			SCONДАР ELECTRONIC LIMITED ENGINEER YAO APPROVED			OPERATION		DRAW	YaoQ	2016. 06. 15	SCALE	—	 SCONДАР ELECTRONIC LIMITED		
				X. X	±0.35	DESIGN	Lyao	2016. 06. 16	UNIT	mm					
				X. XX	±0.25				SIZE	A4					
A0	2016. 06. 18	NEW				X. XXX	±0.15	CHECK	Lisa	2016. 06. 18	SHEET	1/1			PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	DIM	TOL	APPROVE			PROJ.		TITLE:	IDC Red PH2.54 2xXXPin Tin with Pole PBT WV Tray IDC Socket