
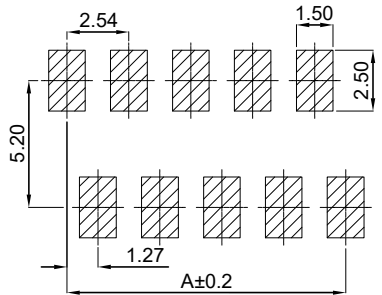
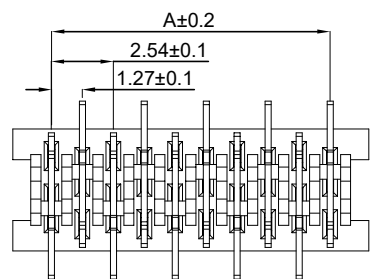





RoHS

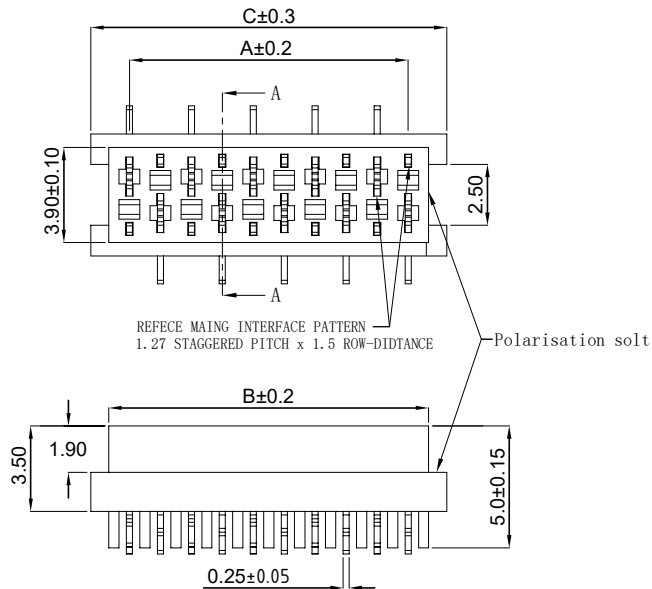

Recommended P.C. Board Layout

TECHNICAL PARAMETERS:
Rated current: 1A AC/DC
Withstand voltage: 1000V AC/minute
Insulation resistance: 1000MΩ min
Contact resistance: 20M MAX
Operating temperature: -40° C ~ +105° C
Insulator Material: PA9T UL 94V-0
Red (红色)
Contact Plating: tin over nicker
Contact Material: Brass

Ordering Information

IDC 254 RD WVS - 2xx S E 3 503

Colour RD=Red
Type WVS=180°SMT
No.of Pins 210=2x10PIN
Plating G=Gold Plated S=Tin Plated
Material E=PA9T
Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimensions			PIN
A	B	C	
3.81	5.50	6.99	2x2
6.35	8.04	9.53	2x3
8.89	10.58	12.07	2x4
11.43	13.12	14.61	2x5
13.97	15.66	17.15	2x6
16.51	18.20	19.69	2x7
19.05	20.74	22.23	2x8
21.59	23.28	24.77	2x9
24.13	25.82	27.31	2x10
26.67	28.36	29.85	2x11
29.21	30.90	32.39	2x12
31.75	33.44	34.93	2x13

SCONDAR ELECTRONIC LIMITE
ENGINEER YAO APPROVED

OPERATION		DRAW	YaoQ	2016.06.15	SCALE	—
X. X	±0.35					
X. XX	±0.25	DESIGN	Lyao	2016.06.16	UNIT	mm
X. XXX	±0.15	CHECK	Lisa	2016.06.18	SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	1/1



SCONDAR ELECTRONIC LIMITED

AO	2016.06.18	NEW	—	—	—	PART NO.	IDC254RDWVS-2XXSE3503
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	—	TITLE:	IDC Red PH2.54 2xXXPin Tin PA9T RD Tray WV SMT IDC Socket